



Co-Flow, Non-Premixed Methane/Air Flame

APP-GT-5 (v2.0) August 30, 2010

Summary

This application note describes the analysis of a co-flow, non-premixed methane/air flame, using the Cylindrical Shear-Flow Reactor and a user-routine option to establish the inlet co-flow conditions.

Introduction

In this example, we establish a co-annular flow inlet condition by employing the user routine option to override the default inlet profiles. By default, the cylindrical shear-flow reactor model uses a uniform inlet and initial profile for all variables except axial velocity. The default inlet velocity profile is considered to be fully developed. The user-routine option, however, allows us to specify an arbitrary inlet condition, as long as it obeys the radial symmetry condition of the Cylindrical Shear-flow Reactor. In this case, properties of both jets are assumed to be uniform when they enter the reactor so there is a jump in the inlet profiles at the jet interface. A non-premixed flame will be established downstream as fuel and air are mixed due to diffusion. The co-flow annular jet configuration is shown in Figure 1 and properties of the inner (fuel) and the outer (air) jets are given in Table 1. For this example, we assume that the outer wall is adiabatic.

Figure 1. Confined Co-flowing Annular Jet Configuration.

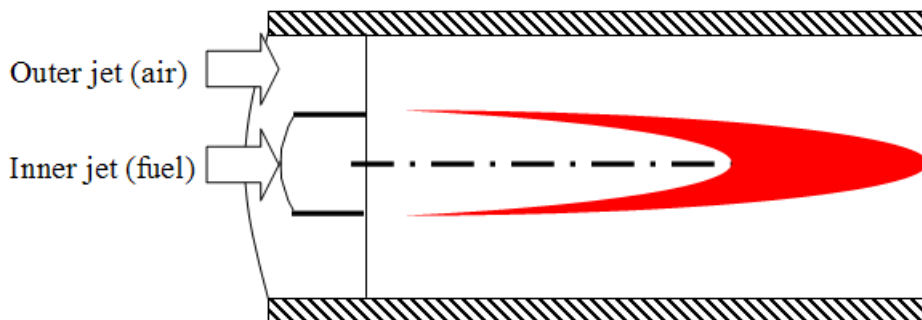


Table 1. Properties of the Co-flowing Jets

| | Inner Jet (Fuel) | Outer Jet (Air) |
|-------------------|------------------|-----------------|
| Radius (cm) | 0.8 | 4.0 |
| Velocity (cm/sec) | 10 | 25 |

| | Inner Jet (Fuel) | Outer Jet (Air) |
|-------------------------------|------------------|-----------------|
| Temperature (K) | 600 | 1000 |
| H ₂ Mass Fraction | 0.05 | 0 |
| CH ₄ Mass Fraction | 0.45 | 0 |
| O ₂ Mass Fraction | 0 | 0.2329 |
| N ₂ Mass Fraction | 0.5 | 0.7671 |

Application Setup

The GRI-Mech 3.0 reaction mechanism is used for the gas-phase combustion chemistry for methane. No surface-chemistry mechanism is needed because the outer wall is assumed to be chemically inert.


The user routine options are not shown in the graphical User Interface by default. To make these options available from the User Interface, the Display User Routine Options box in the Preferences panel must be checked. Once **Display User Routine Options** is enabled, the **Get Solution Profile from User Routine** option will become available when the Reactor Physical Property panel is opened. Once this option is selected, the reactor model will use the initial profiles defined by the `CRUPROF` subroutine, which must be compiled and linked to the Shear-Flow Reactor model, following the instructions in the CHEMKIN API manual. In addition to the user routine option, also specify other reactor parameters such as the number of grid points in the radial direction, reactor pressure, reactor radius (radius of the outer pipe wall), and ending axial position.

The cylindrical shear flow reactor model will set the outer wall temperature to the inlet stream temperature when the wall is not chemically active (no surface chemistry). If the inlet temperature given in the Stream Property Data panel is different from that of the outer jet (as defined in the user profile routine), a thermal boundary layer will be developed next to the outer wall.

Summary

After the simulation has completed successfully, we can visualize contour plots of solution variables in the CHEMKIN Post-Processor. Since this is an axisymmetric problem, the reactor model only solves the top half of the flow domain. To visualize the solutions of the entire physical domain, we have the CHEMKIN Post-Processor reconstruct contours in the bottom half of the physical domain by “mirroring” the contours with respect to the x-axis. The results are shown for Temperature in Figure 2, showing a classic diffusion jet flame profile. The main assumption that is made in employing the Shear-flow Reactor for this type of simulation is that axial diffusion is negligible, relative to convection and radial diffusion. For high-speed jets, this can be a reasonable assumption.

Figure 2. Final 3-D Temperature Contours of the Entire Physical Domain with Vertical Contour Legend (Colorbar).

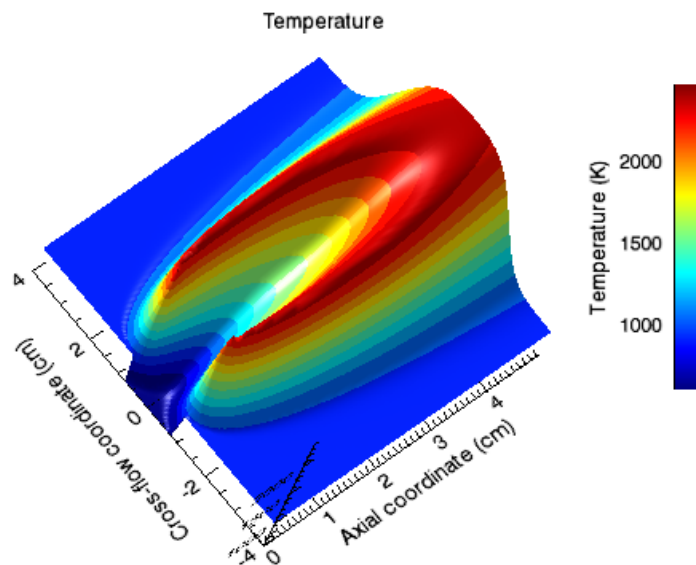

About Reaction Design

Reaction Design helps transportation manufacturers and energy companies rapidly achieve their Clean Technology goals by automating the analysis of chemical processes via simulation and modeling solutions. Reaction Design is the exclusive developer and distributor of CHEMKIN and CHEMKIN-PRO, the *de facto* standards for modeling gas-phase and surface chemistry, providing engineers ultra-fast access to reliable answers that save time and money in the development process. Reaction Design also offers the CHEMKIN-CFD software module, which brings detailed kinetics modeling to other engineering applications, such as Computational Fluid Dynamics (CFD) programs. Reaction Design's world-class engineers, chemists and programmers have expertise that spans multi-scale engineering from the molecule to the production plant. Reaction Design serves more than 350 customers in the commercial, government and academic markets.

Reaction Design can be found online at www.reactiondesign.com.

CHEMKIN® and Reaction Design® are registered trademarks of Reaction Design. CHEMKIN-PRO, CHEMKIN-CFD and Model Fuels Consortium are trademarks of Reaction Design.